


**EARTH ELECTRODES CLAMPS, HAMMER INSERTS, IMPACT SPIKES earth electrode clamp**

**F285036**




**MATERIAL:**

stainless acid-resistant V4A steel

**DESCRIPTION:**

For connecting the earth electrode with a flat conductor.

\*B - maximum tape conductor width

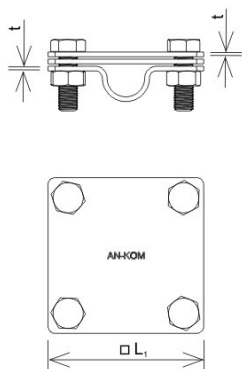

|                                 |                                    |
|---------------------------------|------------------------------------|
| <b>symbol</b><br>type           | <b>F285036</b><br>AN-52C/OH/       |
| <b>earth electrodes</b>         | Ø16                                |
| <b>t(mm)</b>                    | 2                                  |
| <b>L1(mm)</b>                   | 66                                 |
| <b>conductor(mm)</b>            | B* to 40                           |
| <b>screws</b>                   | M8 x 30                            |
| <b>material</b>                 | stainless acid-resistant V4A steel |
| <b>current resistance class</b> | H=100 kA                           |



AN-KOM 2 Sp. z o.o.  
 Inwałd, ul. ks. Władysława  
 Bukowińskiego 15  
 34-120 Andrychów



an-kom.pl  
 sales@an-kom.pl



tel./fax  
 +48 605 527 132