

EARTH ELECTRODES GROUNDING CONNECTORS grounding connector

F285052




WERSJA MATERIAŁOWA:

stainless acid-resistant V4A steel

OPIS:

The grounding connector is installed at the stage of building foundations. The product can be used as a potential equalization point or a point of a lightning protection system. For the material version: hot-dip galvanized steel, the front part is made of acid-resistant stainless steel /OH/, grade 1.4404 (V4A), connection rod is made of hot-dip galvanized steel /OG/. In the case of the material version: stainless steel, both the front part and the connecting rod are made of acid-resistant stainless steel /OH/ in grade 1.4404 (V4A).

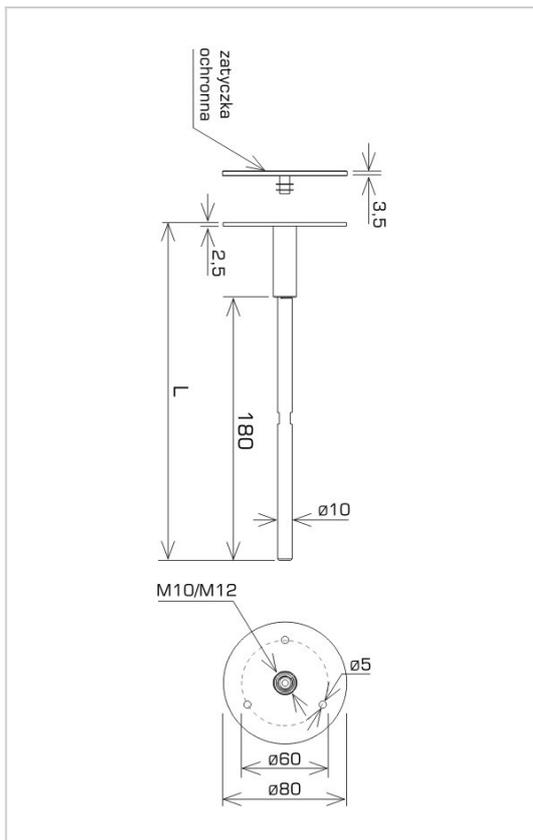

symbol typ	F285052 AN-52K/OH/
L(mm)	235
wersja materiałowa	stainless acid-resistant V4A steel
klasa odporności prądowej	H=100 kA



AN-KOM 2 Sp. z o.o.
 Inwałd, ul. ks. Władysława
 Bukowińskiego 15
 34-120 Andrychów



an-kom.pl
 sales@an-kom.pl



tel./fax
 +48 605 527 132