

EARTH ELECTRODES GROUNDING CONNECTORS grounding connector

F285052




**MATERIAL:**

stainless acid-resistant V4A steel

**DESCRIPTION:**

The grounding connector is installed at the stage of building foundations. The product can be used as a potential equalization point or a point of a lightning protection system. For the material version: hot-dip galvanized steel, the front part is made of acid-resistant stainless steel /OH/, grade 1.4404 (V4A), connection rod is made of hot-dip galvanized steel /OG/. In the case of the material version: stainless steel, both the front part and the connecting rod are made of acid-resistant stainless steel /OH/ in grade 1.4404 (V4A).

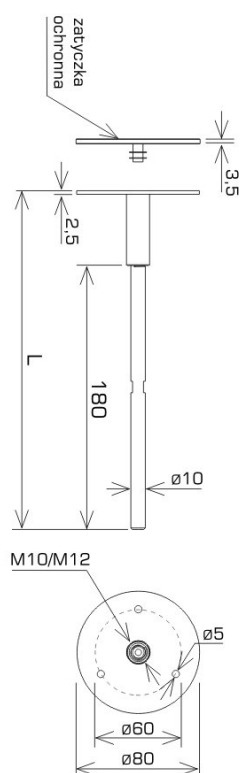

<b>symbol</b> type	<b>F285052</b> AN-52K/OH/
<b>L(mm)</b>	235
<b>material</b>	stainless acid-resistant V4A steel
<b>current resistance class</b>	H=100 kA



AN-KOM 2 Sp. z o.o.  
Inwałd, ul. ks. Władysława  
Bukowińskiego 15  
34-120 Andrychów



an-kom.pl  
sales@an-kom.pl



tel./fax  
+48 605 527 132