


AIR TERMINATION RODS STEEL BASE MASTS, SEAM MASTS rod

H196008

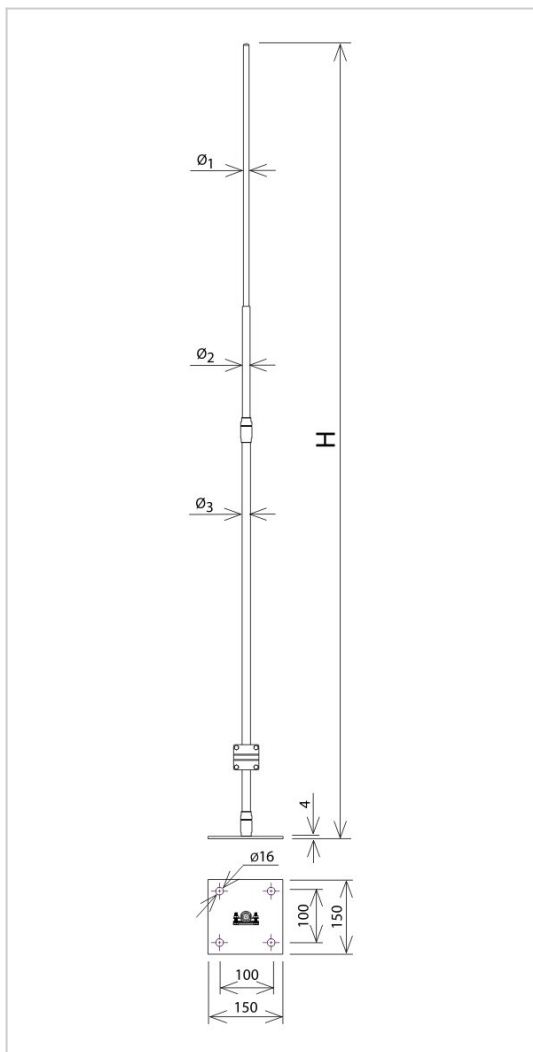

MATERIAL:

hot galvanised steel

DESCRIPTION:

They are used to protect devices exposed to direct lightning current. They are always offered complete with accessories: lightning current discharge connector.

ASSEMBLY: by screwing the base of the mast to the substructure.

*F (kN) - minimum tensile load of the anchor

| | |
|-----------------------|-------------------------------|
| symbol type | H196008 AN-80AS/OG/ |
| H(mm) | 1000 |
| wind resistance(km/h) | 247 |
| F*(kN) | 2 |
| Ø1 / Ø2 / Ø3(mm) | 10 / --- / --- |
| conductor(mm) | Ø8 |
| material | hot galvanised steel |



AN-KOM 2 Sp. z o.o.
Inwałd, ul. ks. Władysława
Bukowińskiego 15
34-120 Andrychów



an-kom.pl
sales@an-kom.pl



tel./fax
+48 605 527 132