


AIR TERMINATION RODS STEEL BASE MASTS, SEAM MASTS tubular

H196204

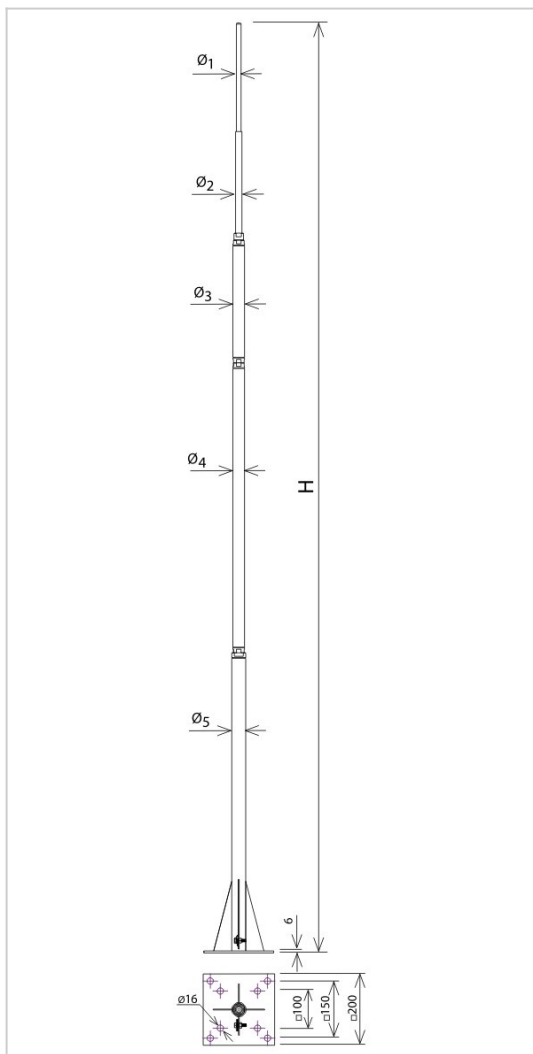

**MATERIAL:**

hot galvanised steel

**DESCRIPTION:**

They are used to protect devices exposed to direct lightning current. They are always offered complete with accessories: lightning current discharge connector.

**ASSEMBLY:** by screwing the base of the mast to the substructure.

\*F (kN) - minimum tensile load of the anchor

|                                   |                              |
|-----------------------------------|------------------------------|
| <b>symbol</b><br>type             | <b>H196204</b><br>AN-86A/OG/ |
| <b>H(mm)</b>                      | 5000                         |
| <b>wind resistance(km/h)</b>      | 204                          |
| <b>F*(kN)</b>                     | 12                           |
| <b>Ø1 / Ø2 / Ø3 / Ø4 / Ø5(mm)</b> | 10 / --- / --- / 33,7 / 42,4 |
| <b>conductor dimensions(mm)</b>   | Ø8                           |
| <b>material</b>                   | hot galvanised steel         |



AN-KOM 2 Sp. z o.o.  
Inwałd, ul. ks. Władysława  
Bukowińskiego 15  
34-120 Andrychów



an-kom.pl  
sales@an-kom.pl



tel./fax  
+48 605 527 132