


AIR TERMINATION RODS STEEL BASE MASTS, SEAM MASTS tubular

H196208

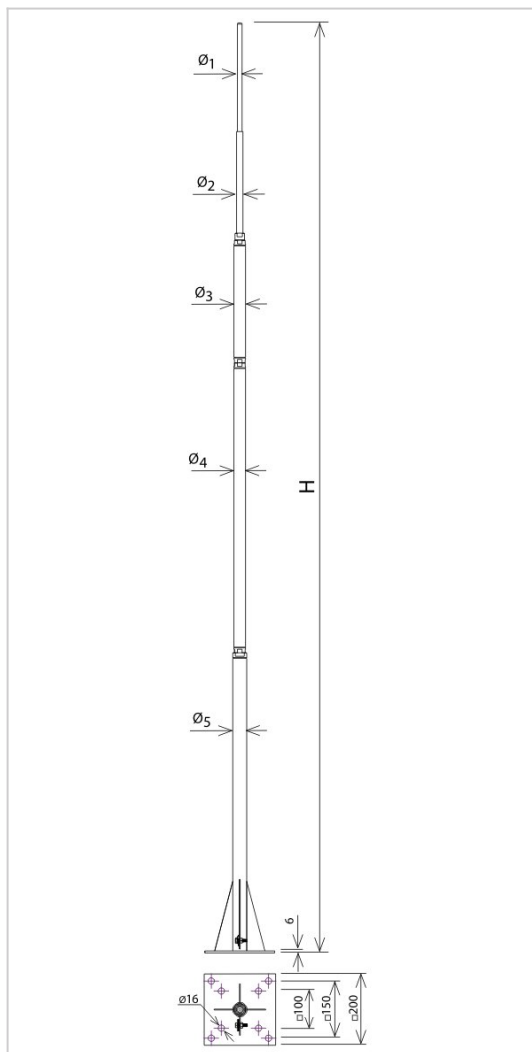

MATERIAL:

hot galvanised steel

DESCRIPTION:

They are used to protect devices exposed to direct lightning current. They are always offered complete with accessories: lightning current discharge connector.

ASSEMBLY: by screwing the base of the mast to the substructure.

*F (kN) - minimum tensile load of the anchor

symbol type	H196208 AN-86B/OG/
H(mm)	6000
wind resistance(km/h)	170
F*(kN)	12
Ø1 / Ø2 / Ø3 / Ø4 / Ø5(mm)	10 / 16 / --- / 33,7 / 42,4
conductor dimensions(mm)	Ø8
material	hot galvanised steel



AN-KOM 2 Sp. z o.o.
Inwałd, ul. ks. Władysława
Bukowińskiego 15
34-120 Andrychów



an-kom.pl
sales@an-kom.pl



tel./fax
+48 605 527 132