


AIR TERMINATION RODS MASTS FOR HIGH VOLTAGE INSULATED CABLE wall high voltage masts

H196236

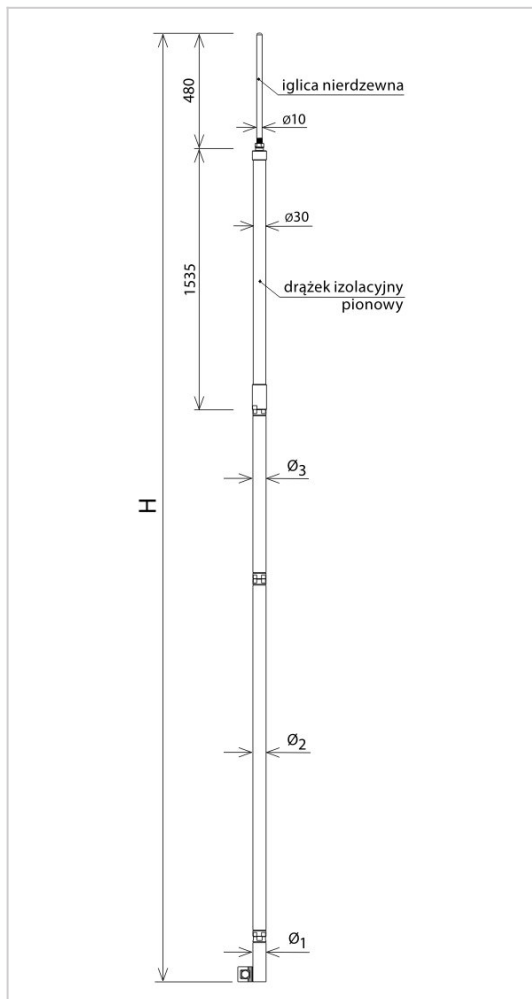

WERSJA MATERIAŁOWA:

hot galvanised steel

OPIS:

The wall PW* spires designed to protect devices on the roofs of industrial facilities in places where it is not possible to maintain an intrinsically safe distance. The lightning current from the mast spire is discharged through a conductor in PW high-voltage insulation. Mounting with holders (ordered separately) directly to protected devices or railings.

*PW - high-voltage insulated conductor

THE SCHEME OF WALL PW MAST

symbol typ	H196236 AN-87J/OG/
H(mm)	4000
wind resistance(km/h)	213
F**(kN)	4
Ø1 / Ø2 / Ø3(mm)	33,7 / 33,7 / ---
wersja materiałowa	hot galvanised steel



AN-KOM 2 Sp. z o.o.
 Inwałd, ul. ks. Władysława
 Bukowińskiego 15
 34-120 Andrychów



an-kom.pl
 sales@an-kom.pl



tel./fax
 +48 605 527 132